


Cat6 Keystone Jacks

D-Link Category 6 keystone jacks are RJ45 8P 8C 50u jacks suitable for 22-26 AWG stranded and solid wire, compatible with both 110 & Krone punch down tool. They are capable of re-termination. They are available in universal labels color coded for T568A and T568B wiring schemes and fit in high density keystone patch panel. It supports IEC 60603-7-4 and complied with ANSI/TIA/EIA-568-C.2 standard.

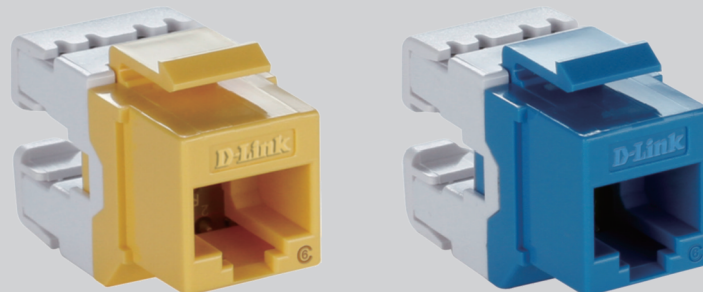

SPECIFICATIONS

RJ45 Jack:	Housing: ABS+PC, UL 94V-0, with optional color
Contact Bracket:	PC, UL 94V-2, transparent color
PCB Material:	FR-4 T=1.2mm
RJ45 Jack Contact:	Material-phosphor bronze with nickel plated Finish: 50 micro-inch gold plated on plug contact area
IDC:	Housing- PC + glass fiber, UL 94V-2 Terminal: Phosphor bronze with tin plated
IDC CAP:	ABS, UL 94V-0
Insertion Cycles:	750 times
IDC Life:	200 times Min.
Wire:	AWG 22-24
Operating Temperature:	-10°C to 60°C
Storage Temperature:	-10°C to 80°C
Current Rating:	1.5A
Insulation Resistance:	> 100 Megaohms

Contact Resistance	
Variations:	20 Milliohms
Insertion Force:	20N (Max)

ORDERING INFORMATION

CAT6 UTP Keystone Jacks		
Part Code	Description	Color Code
NKJ-C6WHI1B21	Cat6 UTP Keystone Jack	White
NKJ-C6BLU1B21	Cat6 UTP Keystone Jack	Blue
NKJ-C6RED1B21	Cat6 UTP Keystone Jack	Red
NKJ-C6GRN1B21	Cat6 UTP Keystone Jack	Green
NKJ-C6YEL1B21	Cat6 UTP Keystone Jack	Yellow
NKJ-C6ORN1B21	Cat6 UTP Keystone Jack	Orange



D-Link (India) Limited
 Kalpataru Square, 2nd Floor, Kondivita Lane, Andheri-East, Mumbai-400059
 Specifications are subject to change without notice.
 D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
 All other trademarks belong to their respective owners.
 ©2010 D-Link Corporation. All rights reserved. Release 01 (May 2010)