

# Smart Mini DC UPS

Keep Wi-Fi Power On

KP2 Series



AC  $\rightleftharpoons$  DC  
0ms Transfer



Passive PoE  
Supported



Overcharge &  
Overdischarge Protection



V-0 Flame-retardant  
Plastic Enclosure




Honeycomb  
Ventilation

## FEATURES

- With 1 \* Passive PoE, 2 \* DC and 1 \* USB output ports, DC UPS is able to power up multiple devices simultaneously.
- AC to DC 0ms transfer technology keeps your devices working when electricity is ON/OFF shifting.
- With wall-mount slots on the back, DC UPS can be mounted on wall easily.
- Air cooling system provides maximum heat dissipation, ensuring the long-term stability of UPS.
- V-0 flame retardant product housing secures you and your property.
- 16000mAh high-capacity battery (KP2 Plus, KP2 Ultra) provides longer backup time.
- 30W high-power output (KP2 Pro, KP2 Ultra) provides better compatibility.

## TYPICAL APPLICATION SCENARIO

Power up three devices with different voltage

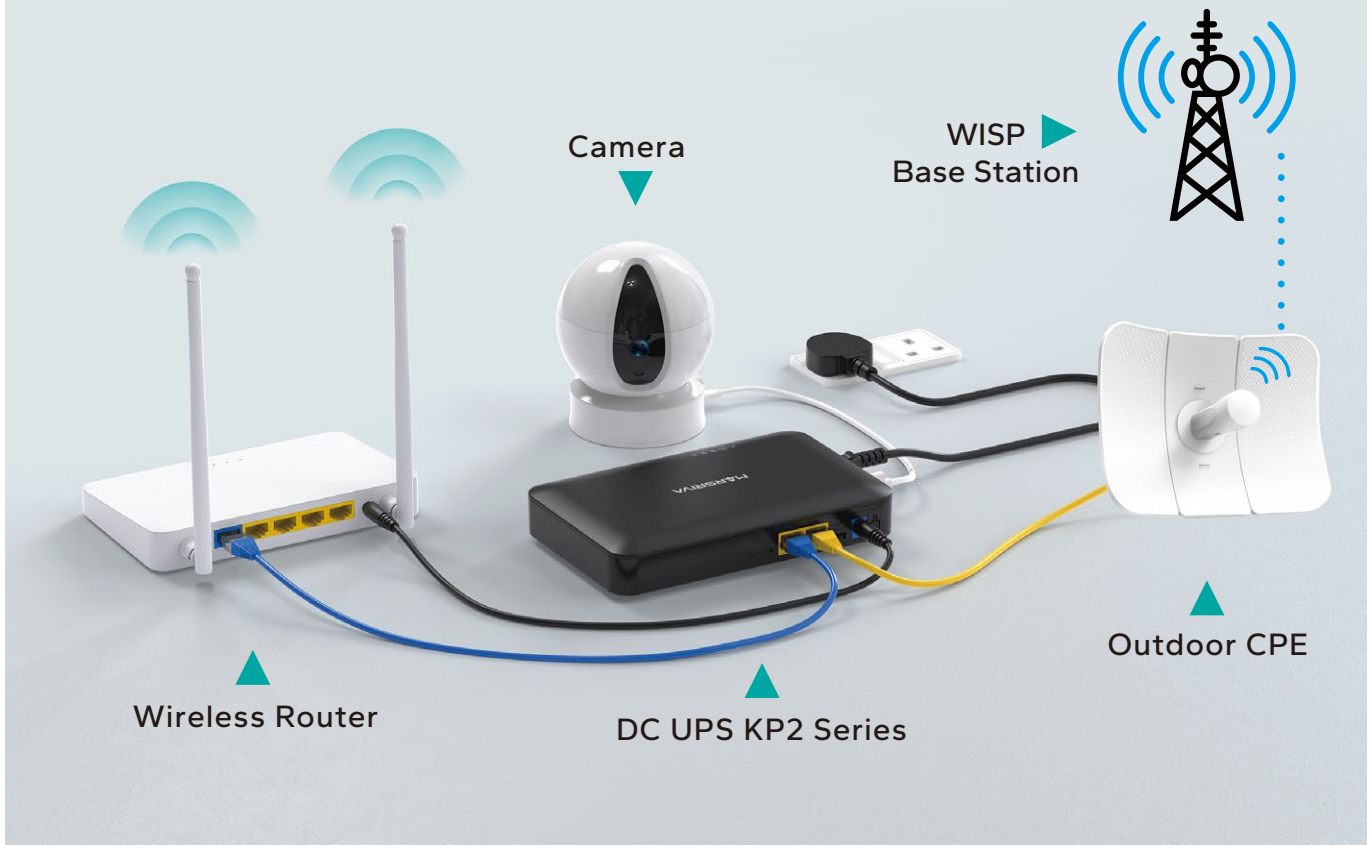

## SPECIFICATIONS

Model	KP2 EC	KP2	KP2 Plus	KP2 Pro	KP2 Ultra
Battery Capacity	29.6Wh	37Wh	59.2Wh	29.6Wh	59.2Wh
Battery Type	Lithium-ion				
Battery Cell	3.7V/4000mAh*2	3.7V/2500mAh*4	3.7V/4000mAh*4	3.7V/4000mAh*2	3.7V/4000mAh*4
Input	100 – 240VAC / 50 – 60Hz				
Output	PoE	24V / 0.75A		24V / 1.0A	
	DC1	9V / 2.0A or 12V / 1.5A		9V / 2.5A or 12V / 2.5A	
	DC2	5V / 2.1A		5V / 2.4A	
	USB	5V / 2.1A		5V / 2.4A	
Total Output	18W (Max.)			30W (Max.)	
Net Weight	340g	348g	490g	358g	512g
Unit Dimension	173mm * 108mm * 31.8mm (L*W*H)				
Operate Temperature	UPS Mode	0°C – 40°C			
	Battery Mode	-15°C – 50°C			
Operate Humidity	Less than 75%RH				
Storage	15°C – 35°C, 40% – 75%RH				