




# DFP-M6AL

## DDS Cat6A Module Easy Punch Tool-less

- Can be mounted in Keystone panels up to 24 ports or wall outlets
- Connectors have TIA 568A/B color code
- Suitable for Power over Ethernet (PoE+) according to IEEE 802.3at
- suitable for round cables with a cable diameter of (AWG 22 - AWG 26)
- CAT 6A jack socket with phosphorous-bronze contacts

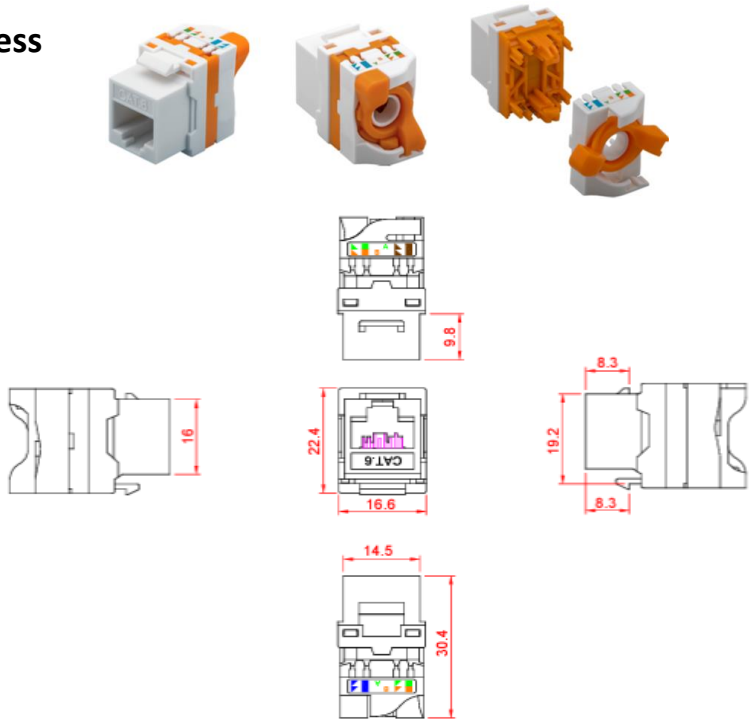

Connection, type	RJ45 female (8P8C)
Connection 2, type	for IDC connection (toolless)
Conductor type	solid wire 22-26 AWG
Category	Cat 6A
Shielding type	UTP
Cable output	180°
max. bandwidth	500 MHz
Material contacts	Phosphor Bronze
Contact resistance	20 mΩ
Insulation resistance	1000 MΩ min. @ 500 V
Rated voltage	125 V ~ RMS
Rated current	1.5 A