D-Link
Building Networks for People

Product Highlights

Full-resolution HDMI Video

Video resolution up to 4K @60Hz Ultra HD, for stunning videos and images with no lag.

Full HDMI Compatibility

View your laptop's screen on an additional monitor or a TV set simply by using any available USB Type-C or Thunderbolt 3 port.

No Installation Needed

Simply connect to an available USB Type-C or or Thunderbolt 3 port and enjoy HDMI video in seconds; no further installation necessary.

DUB-V120

USB-C to HDMI Adapter

Features

HDMI Compatibility

- Ultra HD video resolution up to 4K @60Hz
- Supports HDMI 2.0 and DisplayPort over USB-C Alternative Mode

USB Type-C 3.0 with Simple Installation

- Simply plug-in and you're ready to go
- No additional hardware or software installation required
- Small and compact design makes it easy to take with you wherever you go

Low Power Extends Device Battery Life

- Only consumes 140 mA (± 10%), 5V DC of power
- Designed for use with ultrabooks

The DUB-V120 USB-C to HDMI Adapter allows you to instantly add a second display to your ultra slim laptop. Just plug the DUB-V120 into an available USB Type-C or Thunderbolt 3 port and you are ready to connect to your TV or monitor with the full framerate, resolution, and reliability of a wired video connection.

Fully-Featured HDMI Video Connectivity

The DUB-V120 USB-C to HDMI Adapter plugs into any available USB Type-C or Thunderbolt 3 port on your computer and enables you to connect to a HDMI display with a resolution of up to 4K at 60 frames per second. HDMI 2.0 allows you to display 4K HDR content.

Easy to Install and Use

The DUB-V120 USB-C to HDMI Adapter connects to your computer's USB Type-C port and is ready to run as soon as it is plugged in. The Plug-and-Play design ensures that there is no need to install any software on your computer. For extra convenience, the adapter's ultraportable compact design means that you can easily slip the DUB-V120 into your pocket or laptop bag and take it with you.

DUB-V120 USB-C to HDMI Adapter

Hardware Overview

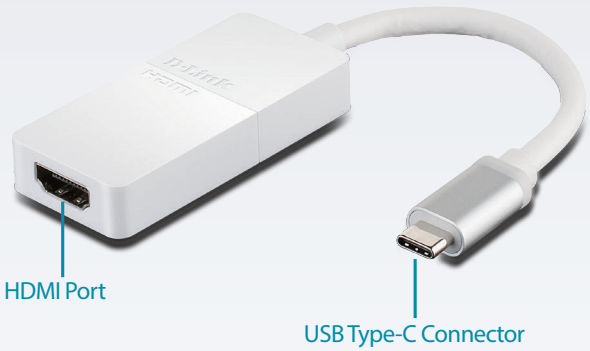

Technical Specifications		
Connectivity		
Device Interfaces	• HDMI Port (3840 x 2160 or 4096 x 2160 pixels @60 Hz)	• USB Type-C Connector (Thunderbolt 3 compliant)
Standards	• USB Specification Version 3.1 Gen 1 • USB Specification Version 2.0 • USB Specification Version 1.1	• HDMI 2.0 • DisplayPort Alternative Mode • EDID
General		
Minimum System Requirements	• Computer with Microsoft Windows® OS, Mac OS® , or Chrome OS™.	• Available USB Type-C Port with DisplayPort Alternate Mode Supported
Physical		
Dimensions	• 67.0 x 30.5 x 10.5 mm (2.64 x 1.20 x 0.41 in)	• Cable length: 12.3 cm (4.84 in)
Weight	• 26.34 g (0.93 oz)	
Power	• Input: Bus-powered	• Consumption: 140 mA, (± 10%) 5 V DC
Temperature	• Operating: 0 to 40 °C (32 to 104 °F)	• Storage: -20 to 70 °C (-4 to 158 °F)
Humidity	• Operating: 10% to 90% RH, non-condensing	• Storage: 5% to 90% RH, non-condensing
Certifications	• CE • FCC • HDMI	• IC • RCM
Order Information		
Part Number	*Description*	
DUB-V120	USB-C to HDMI Adapter	

Updated November 28, 2018

Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries. All other trademarks belong to their respective owners.
©2018 D-Link Corporation. All rights reserved. E&OE.

D-Link®
Building Networks for People